
# Micrometer

The origin of Mitutoyo's trustworthy brand of small tool instruments

### **Digimatic Outside Micrometers SERIES 293**

**MeasurLink®** ENABLED Data Management Software by Mitutoyo

can form part of a statistical process control or networked measurement system. (Refer to page A-3 for details.)





- Models equipped with a Digimatic output port
   Interface Input Tools are available that enable the conversion of measurement data to keyboard signals that are then directly input to cells in off-the-shelf spreadsheet software such as Excel. (Refer to page A-13 for details.)
  - Measuring faces: Carbide.



### **SPECIFICATIONS**


Metric	ı			
Order No.	Range (mm)	Accuracy* (µm)	Flatness (µm)	Parallelism (µm)
293-582	300 - 325			
293-583	325 - 350	±6		5
293-584	350 - 375			
293-585	375 - 400		0.6	
293-586	400 - 425	±7 0.0	0.6	6
293-587	425 - 450			0
293-588	450 - 475			
293-589	475 - 500	IO		7

### Inch/Metric

Order No.	Range (in)	Accuracy* (in)	Flatness (in)	Parallelism (in)
293-782	12-13		0.000024	0.0002
293-783	13-14	±0.0003		
293-784	14-15			
293-785	15-16	±0.00035		
293-786	16-17			0.00024
293-787	17-18			0.00024
293-788	18-19	±0.0004		
293-789	19-20	±0.0004		0.00028

<sup>\*</sup> Excluding quantizing error of ±1 count

### **DIMENSIONS**

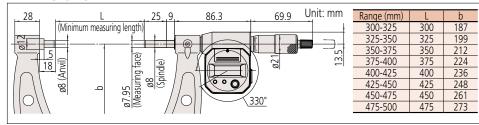

# **SERIES 293 — Digimatic Outside Micrometers**

- Extended battery life of approximately 2.4 years.
- Simple design and excluding the data output function keeps price economical.
- One switch operation (Origin Set) for easy use.
- Equipped with Ratchet Stop for constant measuring force.
- Measuring faces: Carbide.



### **SPECIFICATIONS**

**DIMENSIONS** 


Metric	With ratchet stop/Measuring force: 5-10 N			
Order No.	Range (mm)	Resolution (mm)	Accuracy* (µm)	
293-821-30	0 - 25	0.001	±2	

<sup>\*</sup> Excluding quantizing error of ±1 count

Inch/Metric	With ratchet stop/Measuring force: 5-10 N		
Order No.	Range (in)	Resolution	Accuracy* (in)
293-831-30	0 -1	0.00005 in/0.001 mm	±0.0001

# \* Excluding quantizing error of ±1 count

# Unit: mm

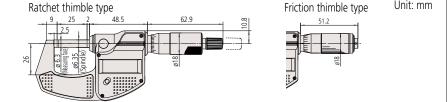

## **Technical Data**

MeasurLink® ENABLED

Resolution: 0.001 mm or 0.0001 in/0.001 mm Measuring force: 10 to 15 N

SR44 (2 pcs.), 938882, for initial operational checks (standard accessory)

Products equipped with the measurement data output function can be connected to the measurement data network system MeasurLink (refer to page A-5 for details).

Battery life: Approx. 1.8 years under normal use Length standard: Electromagnetic rotary sensor Standard accessories: Reference bar, 1 pc.

Spanner (200154), 1 pc.

### **Functions**

Origin point setting (ABS measurement system): Resets the ABS origin at the current spindle position to the minimum value of the measuring range and switches to ABS mode

Zero-setting (INC measurement system):
A brief press on the ZERO/ABS button sets display to zero at the current spindle position and switches to the incremental (INC) measuring mode. A longer press resets to the ABS measuring mode.

to the ABS measuring mode.

Hold:

Pressing the HOLD button freezes the current value in the display. This function is useful for preserving a measurement in situations of poor visibility where the instrument must be moved away from the workpiece before the reading can be recorded.

Function lock:

This function allows the PRESST (origin point setting)

This function allows the PRESET (origin point setting) function and the ZERO (zero-setting) function to be locked to prevent these points being reset accidentally. **Auto power ON/OFF:** 

The reading on the LCD disappears after this instrument is idle for about 20 minutes, but the reading and measurement mode are retained. Turning the spindle causes the reading to reappear.

Models equipped with this function have an output port for transferring measurement data to a Statistical Process Control (SPC) system.

### Error alarm

In case of an overflow on the LCD or a computing error, an error message appears on the LCD, and the measuring function stops. This prevents an instrument from giving an erroneous reading. Also, when the battery voltage drops to a certain level, the low-battery-voltage alarm annunciator appears well before the micrometer becomes unusable.

### **Optional Accessories**

- Connecting Cables
  Recommended cables:
  L-Type (does not interfere with operating the thimble.)
  1 m: 04AZB512

- T m: 04AZB512 2 m: 04AZB513 Straight type (may interfere with operating the thimble.) 1 m: 959149 2 m: 959150

Refer to page B-68 for detailed information about recommended cables.



An inspection certificate is supplied as standard. Refer to page U-11 for details

### **Technical Data**

SR44 (1 pc.), 938882, for initial operational checks (standard accessory)
Length standard: Electromagnetic rotary sensor Spanner (301336), 1 pc.

### **Functions**

Zero-setting:
A brief press on the ORIGIN button sets display to zero at the current spindle position (zero-setting), which allows easy comparison measurement.

Auto power ON/OFF:
The reading on the LCD disappears after this instrument is idle for about 20 minutes, but the reading is retained. Turning the spindle causes the reading on the LCD to reappear.

incn/ivietric	with friction thimble/ivieasuring force: 5-10 N			
Order No.	Range (in)	Resolution	Accuracy* (in)	
293-832-30	0 -1	0.00005 in/0.001 mm	±0.0001	

AND COLORS OF STATE O

### Error alarm:

In case of an overflow on the LCD or a computing error, an error message appears on the LCD, and the measuring function stops. This prevents an instrument from giving an erroneous reading. Also, when the battery voltage drops to control the latest of the control to the state of the control to the control to the state of the control to the con a certain level, the low-battery-voltage alarm annunciator appears well before the micrometer becomes unusable.



<sup>\*</sup> Excluding quantizing error of ±1 count